


此圖之零件均由日本日立電機株式會社所製



- S₁ (α-f) TONE SW
 1 DEFEND
 2 250%
 3 500%
- S₂ (α-b) TONE SW
 1 DEFAT
 2 2.51%
 3 2.51%
- S₃ (α-b)
 1 OFF
 2 ON LOW FILTER
 3 ON HIGH FILTER
- S₄ (α-b)
 1 OFF
 2 ON TAPE MONITOR
- S₅ (α-b)
 1 OFF
 2 ON LOUDNESS
- S₆ (α-b)
 1 OFF
 2 ON L-R
- S₇ (α-b)
 1 OFF
 2 ON TAPE MONITOR
- S₈ (α-b)
 1 OFF
 2 ON LOUDNESS
- S₉ (α-b)
 1 OFF
 2 ON L-R
- S₁₀ (α-b) IMPEDANCE SW
 1 BQ
 2 16Ω
- S₁₁ PHASE SW
 1 NORMAL
 2 REVERS SW
- S₁₂ (α-b)
 1 ON
 2 OFF SPEAKER
- S₁₃
 1 OFF
 2 ON AC

- △ OIL
 □ MICA
 ○ MP
 ⊗ MYLAR
 ⊕ NOISELESS
 ⊖ CERAMIC
- S₁ (α-f) FUNCTION SW
 1 TAPE HEAD 16cm/sec
 2 TAPE HEAD 9.5cm/sec
 3. PHONO 1
 4. PHONO 2
 5. TUNER
 6. AUX
- S₂ (α-b)
 1 OFF
 2 ON TAPE MONITOR
- S₃ (α-b)
 1 OFF
 2 ON LOUDNESS
- S₄ (α-b)
 1 OFF
 2 ON L-R

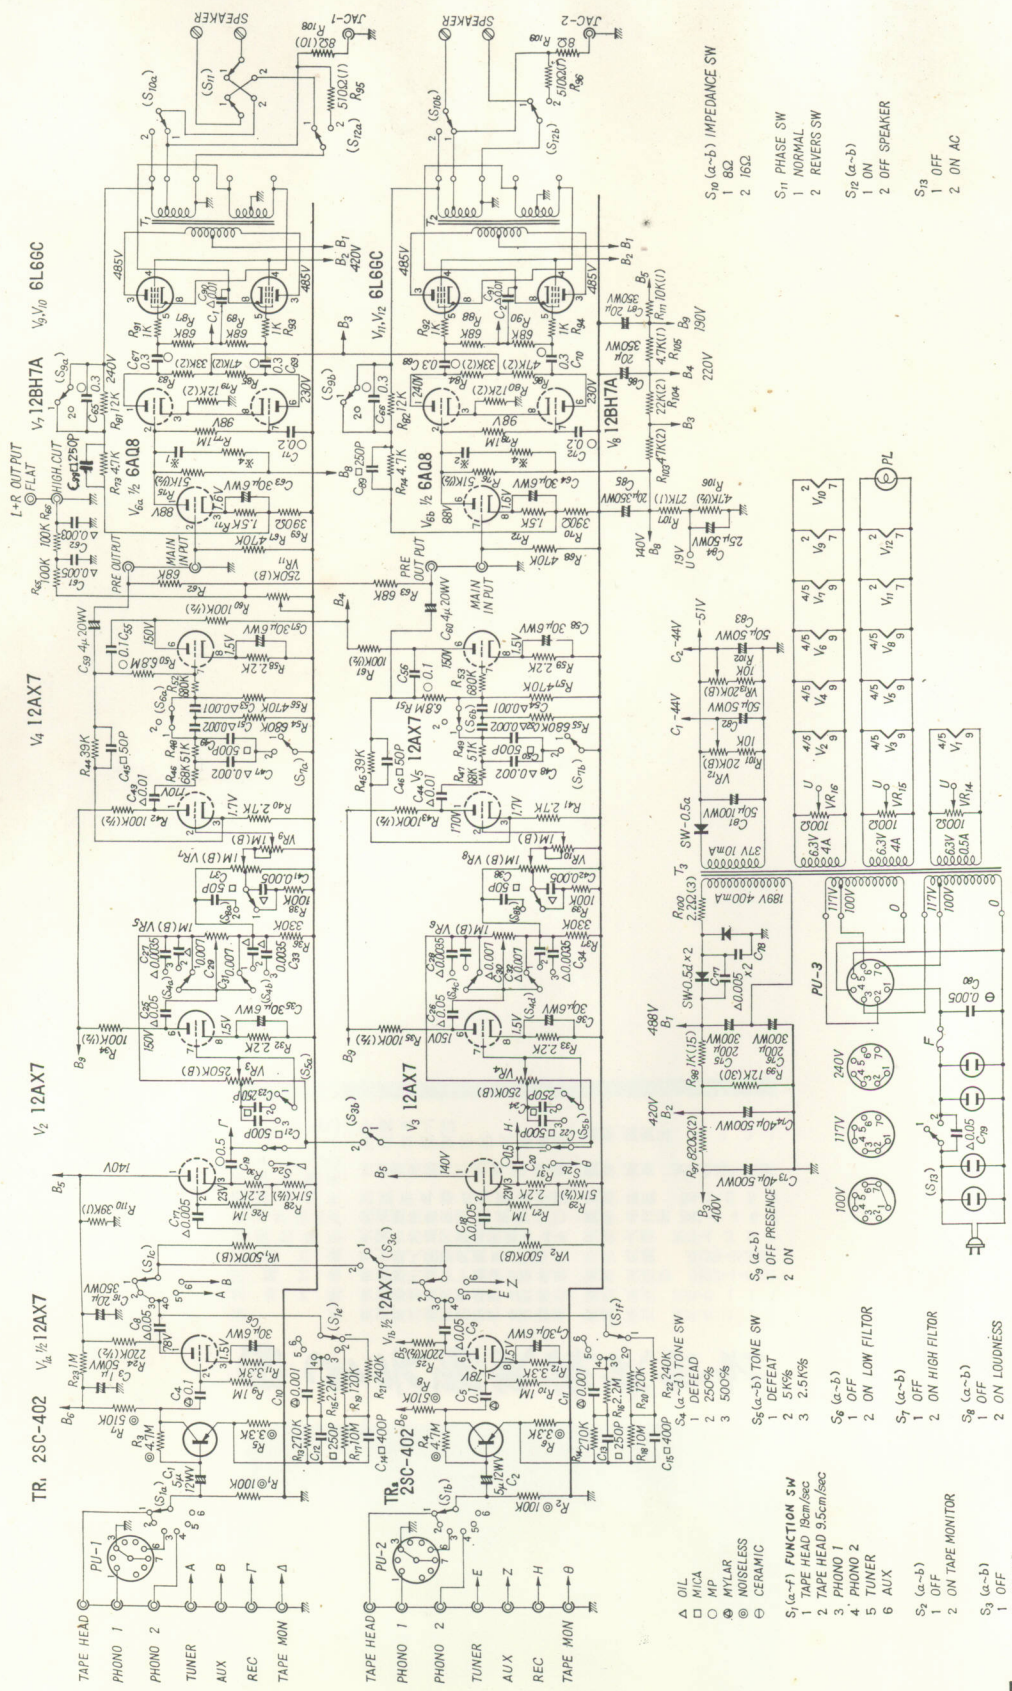