

PARTS LIST AND DESCRIPTIONS (Continued)
TRANSFORMER (AUDIO OUTPUT)

gha01422@nifty.com

ITEM No.	RATING				REPLACEMENT DATA				INSTALLATION NOTES
	IMPEDANCE		DC RES.		Westinghouse PART No.	STANCOR PART No.	MERIT PART No.	CHICAGO PART No.	
	PRI.	SEC.	PRI.	SEC.					
T1	8.2KΩ	3.3Ω	400Ω	.45Ω	V-6567-2	A-3329	A-2998		

SPEAKER

ITEM No.	RATINGS		REPLACEMENT DATA			INSTALLATION NOTES
	FIELD	V. C. IMP.	Westinghouse PART No.	JENSEN PART No.	QUAM PART No.	
SP1	CONE DIA.	V. C. DIA.				
SP2	4½"	9/16"				

R F COILS

ITEM No.	USE	DC RES.		REPLACEMENT DATA		INSTALLATION NOTES
		PRI.	SEC.	WESTINGHOUSE PART No.	MEISSNER PART No.	
L1	Loop Ant.	.2Ω		V-10391-1		Tapped @ 7Ω
L2	RF Coil	14Ω		V-6561-2		
L3	Osc. Coil	2.7Ω	12.5Ω	V-5661	14-1074	
L4	1st. IF	19Ω	19Ω	V-6972-5	16-6668	
L5	2nd. IF	25Ω	25Ω	V-6972-6	16-6669	

SELENIUM RECTIFIER

ITEM No.	RATING	REPLACEMENT DATA			NOTES
	CURRENT	WESTINGHOUSE PART No.	SYLVANIA PART No.	SELETRON PART No.	
M1	.089A	V-9446-2	NB-5	5M4	


BATTERIES

ITEM No.	VOLTAGE	WESTINGHOUSE PART No.	REPLACEMENT DATA						INSTALLATION NOTES
			EVEREADY			BURGESS			
			"A"	"B"	"A-B"	"A"	"B"	"A-B"	
M2	9V "A" 90V "B"				756W			T6Z60	

MISCELLANEOUS

ITEM No.	PART NAME	WESTINGHOUSE PART No.	NOTES
M3	Switch	V-6565	Power Selector
M4	Tuning Cap	V-10372-1	(20-334MMF, 38-294MMF, 25-126MMF)
	Cabinet	V-1235-1	Model H-342P5U
	Cabinet	V-1235-2	Model H-343P5U
	Battery Plug	V-3873	
	Pointer	V-10389-1	Model H-342P5U
	Pointer	V-10389-2	Model H-343P5U
	Knob	V-10388-1	Model H-342P5U
	Knob	V-10388-2	Model H-343P5U

CHASSIS—BOTTOM VIEW

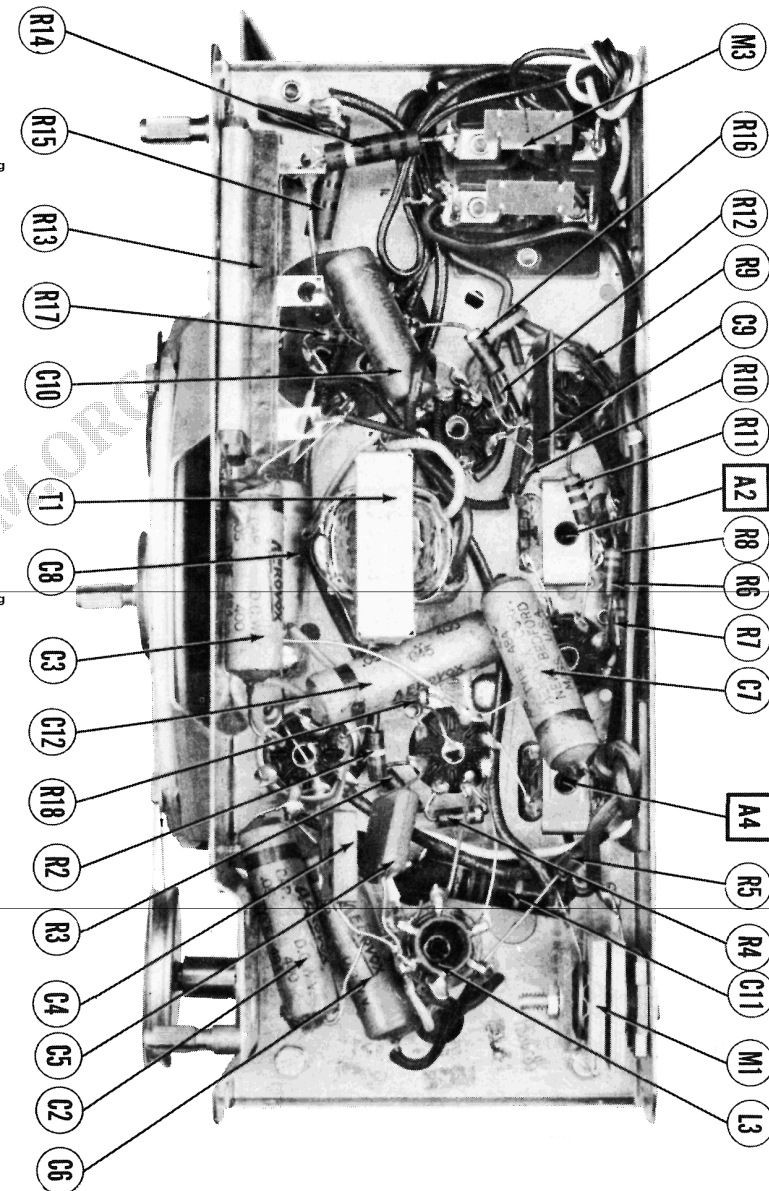

SET 138

FOLDER 13

WESTINGHOUSE
MODEL H-343P5U