


CHASSIS—BOTTOM VIEW

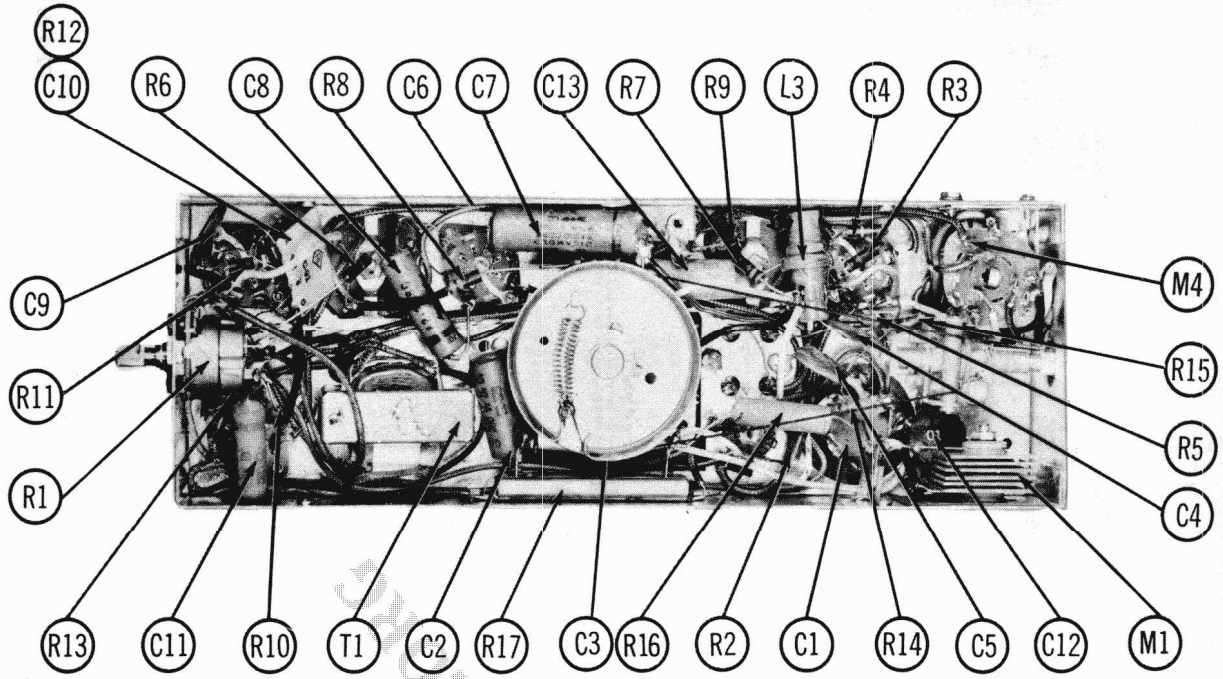

PARTS LIST AND DESCRIPTIONS (Continued)

SPEAKER

ITEM No.	RATINGS		REPLACEMENT DATA		NOTES
	SIZE	FIELD	ZENITH PART No.	QUAM PART No.	
SP1	5 1/4" PM	3.5Ω	49-732	52A21 ①	① Fabricate mounting brackets.

COILS (RF-IF)

ITEM No.	USE	DC RES.		REPLACEMENT DATA		NOTES
		PRI.	SEC.	ZENITH PART No.	MILLER PART No.	
L1	Loop Ant.	Ω		S-19724		Loop, cover & housing assy (part #S-20071). For Model L505F; Loop, cover & housing assy. (part #S-20070) for Model L505R; Loop, cover & housing assy. (part #S-19742) for Model L505Y.
L2	RF Coil	110Ω	4.8Ω	S-20014		
L3	Osc. Coil	1.5Ω	5.5Ω	S-19699		
L4	Input IF	26Ω	26Ω	95-1132	BC-368 †	
L5	Output IF	26Ω	26Ω	95-1133	BC-355 †	

* Disregard tap on secondary winding.
† Drill mounting holes.
‡ Drill mounting holes, cut out center spade bolt mounting support and use adaptor plate.

SELENIUM RECTIFIER

ITEM No.	RATING CURRENT	REPLACEMENT DATA			SARKIS TARZIAN PART No.
		ZENITH PART No.	SYLVANIA PART No.	SELETRON PART No.	
M1	.061ADC	212-5	NE5	5M4	6875

BATTERIES

ITEM No.	VOLTAGE	ZENITH PART No.	REPLACEMENT DATA			INSTALLATION NOTES
			EVEREADY	BURGESS		
M2	9V "A" 9V "B"	Z982	"A" "B"	"A" "B"	"A-B" TZ60P	

MISCELLANEOUS

ITEM No.	PART NAME	ZENITH PART No.	NOTES
M3	Tuning Cap.	22-2455	
M4	Switch	85-520	24-405MMF, 24-405MMF, 37-175MMF
	Cabinet	14-1549	Power Selector
	Cabinet	14-1548	Model L505F
	Cabinet	14-1547	Model L505R
	Bottom Cover	14-1547	Model L505Y
	Handle Assy.	S-20068	Includes bushing
	Handle Assy.	S-20073	Model L505F
	Handle Assy.	S-20072	Model L505R
	Handle Housing	S-19895	Model L505Y
	Grille	43-222	(2 Used)
	Escutcheon	138-64	
	Dial	57-1889	Model L505F
	Dial	26-497	Model L505R
	Dial	26-496	Model L505Y
	Knob	26-493	Off/On/Volume, Tuning Model L505F (2 used)
	Knob	46-1162	Off/On/Volume, Tuning Model L505R (2 used)
	Knob	46-1161	Off/On/Volume, Tuning Model L505Y (2 used)
	Knob	46-1106	Off/On/Volume, Tuning Model L505Y (2 used)