

PARTS LIST AND DESCRIPTIONS TUBES

ITEM No.	USE	TYPE	ITEM No.	USE	TYPE
V1	FM RF Amp.-FM Conv.	ECC85 (6AQ6) *	V4	Ratio Det.-AM Det.-AVC-AF Amp. Output	EABC80 (6T8, 6AE8) *
V2	1st FM IF Amplifier-AM Mixer-AM Osc.	ECHR1 (6A3B) *	V5	Tuning Indicator	EL84 (6BQ5) *
V3	2nd FM-1st AM IF Amp.	EF89 (6DA6) *	V6		EM84

* Alternate

ELECTROLYTIC CAPACITORS


ITEM No.	RATING CAP. VOLT.	NORDMENDE PART No.	AEROVOX PART No.	CORNELL-DUBILIER PART No.	MAILLOGY PART No.	PYRAMID PART No.	SPRAGUE PART No.	NOTES
C1A	100 350	443.021.14	PR81400	NLW4-150	TT60X4	MLV5-100	TE-1403	
C2	50 350	443.062.15	PR81200	NLW100-15	TT15X100	ML100-12	TE-1135	
C3	100 12	443.052.15						

FIXED CAPACITORS

Capacity values given in the rating column are in mfd. for Paper Capacitors, and in mmfd. for Mica and Ceramic Capacitors.

ITEM No.	RATING	REMARKS	AEROVOX PART No.	CENTRALAB DUBILIER PART No.	CORNELL-DUBILIER PART No.	ELWENCO PART No.	MAILLOGY PART No.	SPRAGUE PART No.
C4	40 N750		N750-SI 39	TCN-39	C10Q39U	CCTN-390	CN7-439	10TCC-Q39
C5	40 N750		N750-SI 39	TCN-39	C10Q39U	CCTN-360	CN7-439	10TCC-Q39
C6	15 N750		N750-SI 15	TCN-15	C10Q15U	CCTN-150	CN7-415	10TCC-Q15
C7	25 N750		N750-SI 25	TCN-25	C10Q25U	CCTN-270	CN7-427	10TCC-Q25
C8	51 NPO		NPO-SI 51	TCZ-51	C10Q51C	CCTO-510	CNO-450	10TCC-Q50
C9	470		BFD-00047	DD-471	BYA10T47	CCD-471	B-347	10TS-T47
C10	2200		BFD-0022	D6-222	BYA10D22	CCD-222	B-222	5HK-D22
C11	3-12	#447.000.15						10TCP-Q36
C12	60 N150					CCTO-6R8	CNO-588	10TCC-V88
C13	10 N715							
C14	10 N715							
C15	7 NPO	#447.000.15						
C16	3-12	#447.001.5						
C17	4-11							
C18	10 N715							
C19	7 NPO							
C20	52 N750		NPO-SI 6.8	TCZ-6R8	C10V7C			
C21	50 N750							
C22	300 N750		N750-SI 300	TCN-300	C10T30U	CCTN-30I	CN7-333	10TCC-T33
C23	1000		EF-001	MFT-1000		CCF-102	CT280A	
C24	1000		SI 1000	D6-102		CCD-102	B-210	5HK-D10
C25	5000		SI 1000	TCZ-5I	C10Q5IC	CCTO-510	CNO-450	10TCC-Q50
C26	51 5%	#447.021.15						
C27	3-30	#447.021.15						
C28	3-30	#447.021.15						
C29	3-30	#447.021.15						
C30	22 NPO		NPO-SI 22	TCZ-22	C10Q22C	CCTO-220	CNO-422	10TCC-Q22
C31	1 P100		SI 1000	D6-102	BYA10D1	CCD-102	B-210	5HK-D10
C32	1000		SI 1000	D6-102	BYA10D1	CCD-102	CN7-588	
C33	7 N780		SI 390	TCZ-5I	C10Q5IC	CCTO-510	CNO-450	10TCC-Q50
C34	3-30	#447.021.15						
C35	51 5%							
C36	410							
C37	1300 2.5%							
C38	6000 2.5%							
C39	180 N220		P488N-047	DD-503	CUB4847	4DP-3-473	MCE467	4TM-847
C40	4700		SI 4700	D6-472	BYA10D47M	CCD-472	GEM-4147	5HK-D47
C41	4700		SI 4700	D6-472	BYA10D47M	CCD-472	B-247	5HK-D47
C42	4700		SI 30	D6-330	L10Q30	CCD-300	GP450	10TS-Q30
C43	30		SI 4700	D6-472	BYA10D47M	CCD-472	B-247	5HK-D47
C44	4700		SI 3300	D6-332	BYA10D33	CCD-332	B-233	5HK-D33
C45	3300							

FM RF SUBCHASSIS

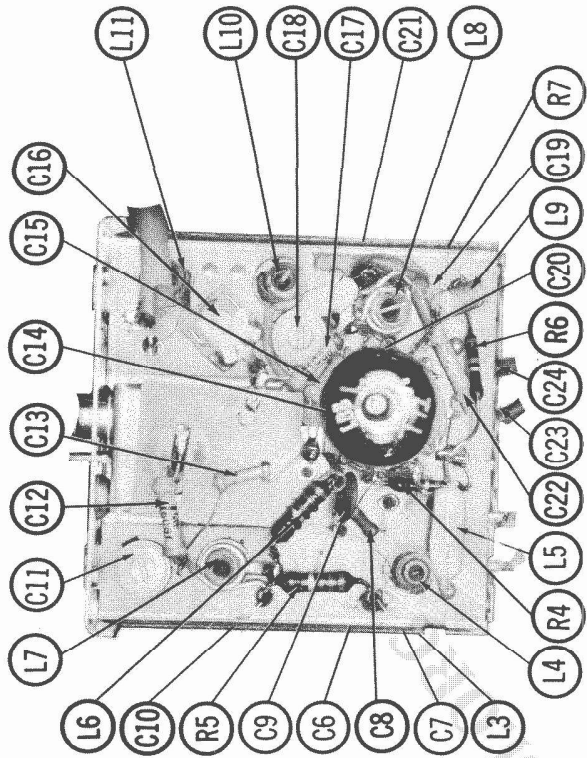

FIXED CAPACITORS (cont)

ITEM No.	RATING	REMARKS	AEROVOX PART No.	CENTRALAB PART No.	CORNELL-DUBILIER PART No.	ELWENCO PART No.	MAILLOGY PART No.	SPRAGUE PART No.
C46	4700		SI 4700	D6-472	BYA10D47M	CCD-472	B-247	5HK-D47
C47	.0047 500V		P688N-0047	DD-472	CUB8D47	8DP-1-472	GEM-6247	5HK-D47
C48	4700		BPD-0047	DD-472	BYA10D47M	CCD-472	B-247	5HK-D47
C49	4700		BPD-0047	DD-472	BYA10D47M	CCD-472	B-247	5HK-D47
C50	.0047 250V		P488N-0047	DD-472	CUB8D47	8DP-1-472	GEM-6247	5HK-D47
C51	100		SI 100	DD-101	L10T1	CCD-101	GP310	10TS-T10
C52	.0047 500V		P688N-0047	DD-472	CUB8D47	8DP-1-472	GEM-6247	5HK-D47
C53	1.250V	Note 1	P488N-1	DF-104	CUB4P1	4DP-3-104	GEM-401	4TM-P10
C54	.22 250V		P488N-22	DF-104	CUB4P22	4DP-5-224	GEM-4022	4TM-P22
C55	.047 250V		P488N-047	DD-473	CUB4847	4DP-3-473	GEM-4147	4TM-847
C56	.01 250V							
C57	.0001 500V		P688N-0001	D6-101	CUB6T1	CCD-101	GP-310	6TM-T10
C58	1.500V		P688N-1	DF-104	CUB4P1	4DP-3-104	GEM-601	6TM-F1
C59	.0047 500V		P688N-0047	DD-472	CUB8D47	8DP-1-472	GEM-6247	6TM-D47
C60	10 500V		P688N-01	D6-103	CUB6S1	CCD-181	GEM-611	6TM-S10
C61	150		SI 150	D6-151	L10T15	CCD-151	B-315	10TS-T15
C62	470		SI 470	D6-471	BYA10T47	CCD-471	B-347	10TS-T47
C63	.0022 500V 10%		P84C8D22-10%	P84C8D22	F84C8D22	8DP-1-322	GEM-16222	6TM-D22

* Not normally in distributor's stock. Available thru distributor on order to manufacturer.
 Note 1. Shielded Unit.
 # Nordmende Part Number.

CONTROLS

ITEM No.	RATING RESIST. WATTS	NORDMENDE PART No.	CENTRALAB PART No.	CLAROSTAT PART No.	CTS-IRC PART No.	MAILLOGY PART No.	INSTALLATION NOTES
R1A	1.3meg	402.122.14	ABT-71				Volume
R2	10meg	402.000.14	AK-29				Base
R3	1meg	402.003.14					Treble

NORDMENDE MODEL Turandot (U-148)

FOLDER 8